


Ellington Swing

DATE REVISED: MAY 2024

WALKER ZANGER

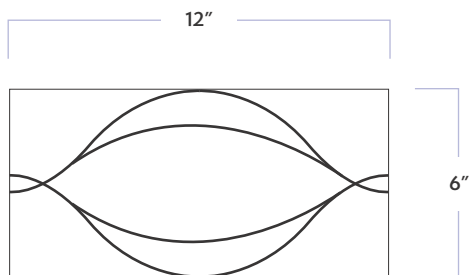

MATERIAL	Natural Stone/Metal
FINISH	Polished
THICKNESS	3/8"
SHEET SIZE	6-1/8" x 12-1/2"
COVERAGE SQFT/PIECE	0.5222 SqFt
MOUNTING	Loose

AVAILABLE COLORS



Cotton/Steel



Cotton/Brass



Ebony/Brass

RECOMMENDED USAGES



Commercial
Exterior Wall



Commercial
Interior Wall



Commercial
Interior Floor



Residential
Exterior Wall



Residential
Interior Wall



Residential
Interior Floor



Shower Wall



Shower Floor*

MATERIAL DATA



V1 Color Variation

MAINTENANCE



Sealing is required prior to grouting



Clean with a damp cloth and
a gentle, non-acidic soap

ADDITIONAL NOTES

For installation on shower floors, please refer to TCNA guidelines and consult with your installer for proper waterproofing and sealing requirements. All Ellington Swing tiles feature natural stone products. We recommend sealing all natural stone products with a penetrating sealer and sealing all porous non-polished stone (limestone, tumbled marble, etc.) prior to grouting. This prevents grout from staining or affecting the color of the stone. Stone is a natural product, and care should be taken to protect it from harsh abrasive cleaners and abrasive cleaning tools. Use caution when using as flooring in any area that will experience more than light foot traffic as this stone has high potential to scratching. For further questions/information about additional usages, please consult with your installer.

**Ellington
Swing**

DATE REVISED: MAY 2024

